




Prepared by: Groschopp.com

08/17/20

Motor: **PM 8058**
Voltage: **12 v DC**
Speed: **5100 rpm** 4 Poles
Gearbox: **None**

Product ID: **4500**

Speed, Efficiency Vs. Torque

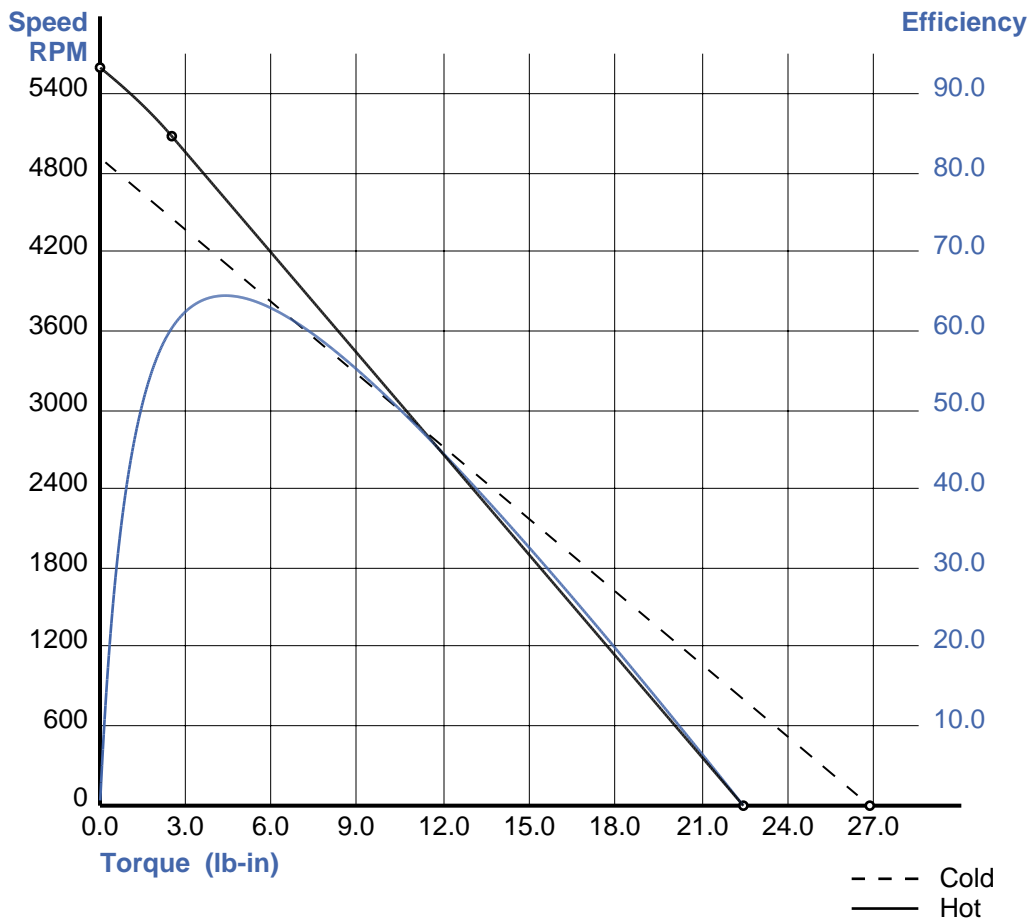

SPECIFICATIONS

Rating:

Speed: 5089.0 rpm
Torque: 2.5lb-in
Current: 19.55 amps
Output: 151 watts
Output: 0.2019 HP

Duty Cycle:

On: Continuous
Off:

Efficiency:

Gearbox:
Motor: 60.5 %
System: 60.5 %

Start/Stall Conditions:

Current: 141.45 amps
Torque: 26.81 lb-in

Constants:

Ke: 2.36 v/krpm
Kt: 0.20 lb-in/amp

Notes: