




Prepared by: Groschopp.com

08/17/20

Motor: PM 6015
Voltage: 12 v DC
Speed: 2400 rpm 2 Poles
Gearbox: RA 2600T 40:1 Ratio

Product ID: 10311

Speed, Efficiency Vs. Torque

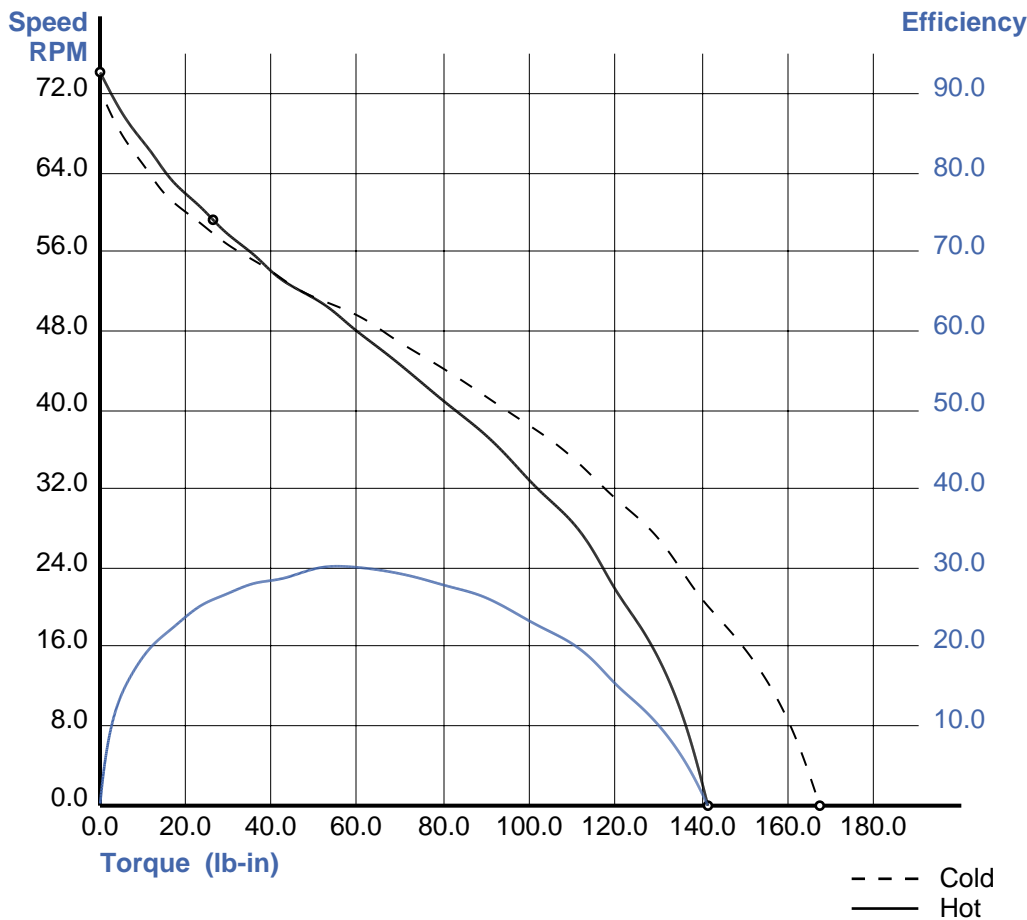

SPECIFICATIONS

Rating:

Speed: 59.4 rpm
Torque: 26.2lb-in
Current: 5.9 amps
Output: 18 watts
Output: 0.0247 HP

Duty Cycle:

On: Continuous
Off:

Efficiency:

Gearbox: 38.3 %
Motor: 68.2 %
System: 26.1 %

Start/Stall Conditions:

Current: 22.45 amps
Torque: 167.13 lb-in

Constants:

Ke: 3.91 v/krpm
Kt: 0.33 lb-in/amp

Notes: