



Prepared by: Groschopp.com

08/17/20

Motor: PM 6015  
Voltage: 12 v DC  
Speed: 2400 rpm 2 Poles  
Gearbox: RA 3000T 15:1 Ratio

Product ID: 10313

SPECIFICATIONS

Rating:

Speed: 158.3 rpm  
Torque: 12.6lb-in  
Current: 5.9 amps  
Output: 24 watts  
Output: 0.0318 HP

Duty Cycle:

On: Continuous  
Off:

Efficiency:

Gearbox: 49.2 %  
Motor: 68.2 %  
System: 33.6 %


Start/Stall Conditions:

Current: 22.45 amps  
Torque: 77.50 lb-in

Constants:

Ke: 3.91 v/krpm  
Kt: 0.33 lb-in/amp

Speed, Efficiency Vs. Torque

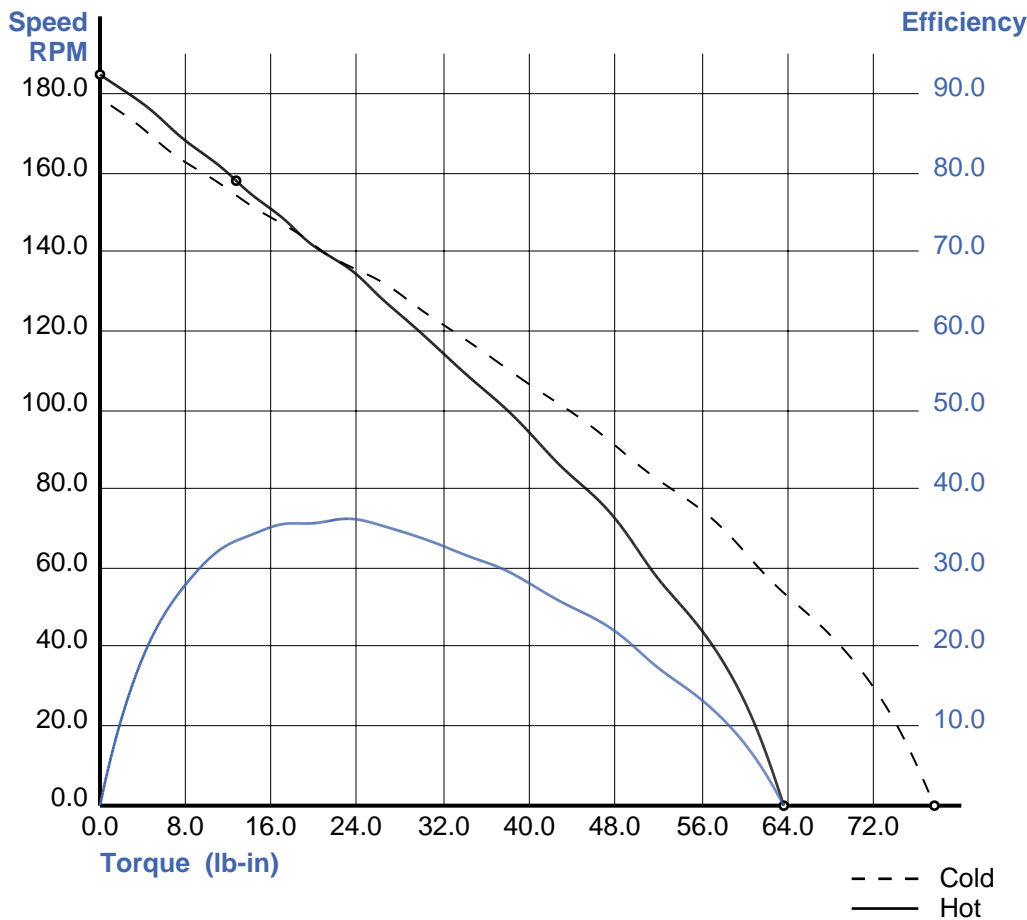

Notes: