




Prepared by: Groschopp.com

08/17/20

Motor: PM 6015
Voltage: 12 v DC
Speed: 800 rpm 2 Poles
Gearbox: RA 2600T 30:1 Ratio

Product ID: 10314

Speed, Efficiency Vs. Torque

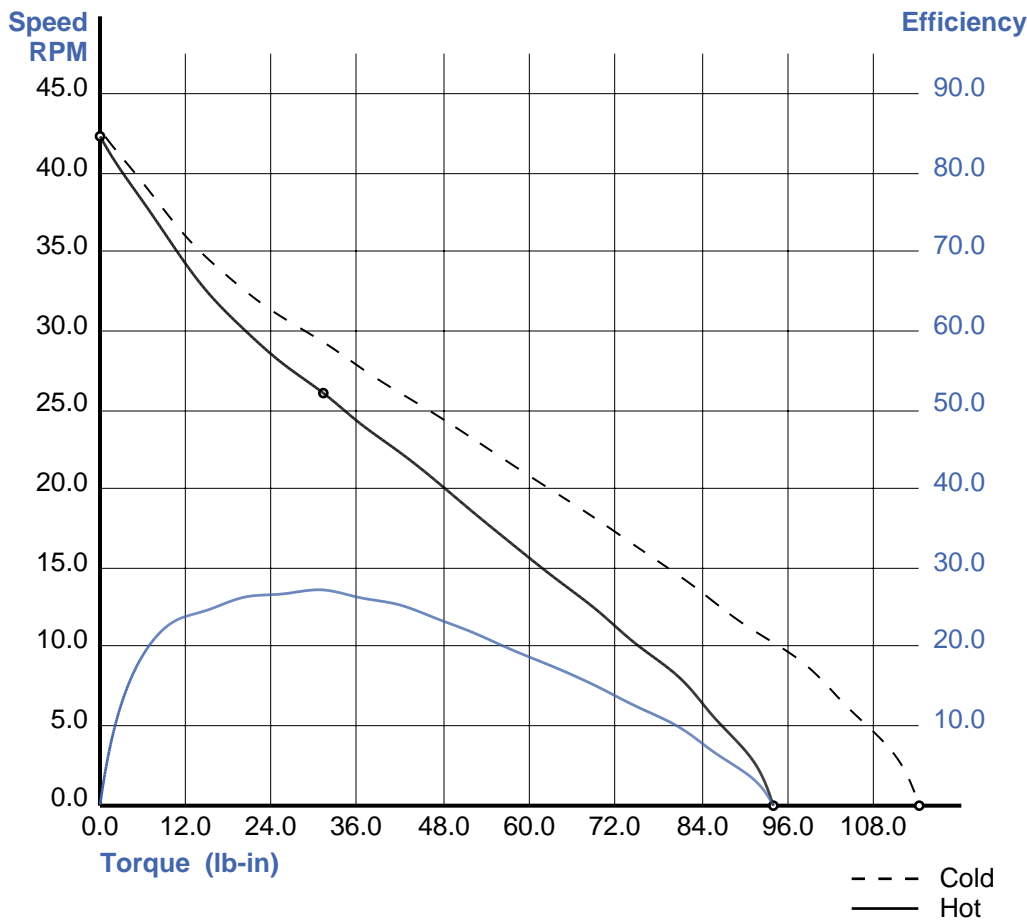

Notes:

SPECIFICATIONS

Rating:

Speed: 26.1 rpm
Torque: 31.1lb-in
Current: 3.4 amps
Output: 10 watts
Output: 0.0129 HP

Duty Cycle:

On: Continuous
Off:

Efficiency:

Gearbox: 47.4 %
Motor: 57.7 %
System: 27.3 %

Start/Stall Conditions:

Current: 8.15 amps
Torque: 114.14 lb-in

Constants:

Ke: 8.70 v/krpm
Kt: 0.74 lb-in/amp