




Prepared by: Groschopp.com

08/17/20

Motor: PM 6015  
Voltage: 12 v DC  
Speed: 800 rpm 2 Poles  
Gearbox: RP 7300 30:1 Ratio

Product ID: 62629

### Speed, Efficiency Vs. Torque

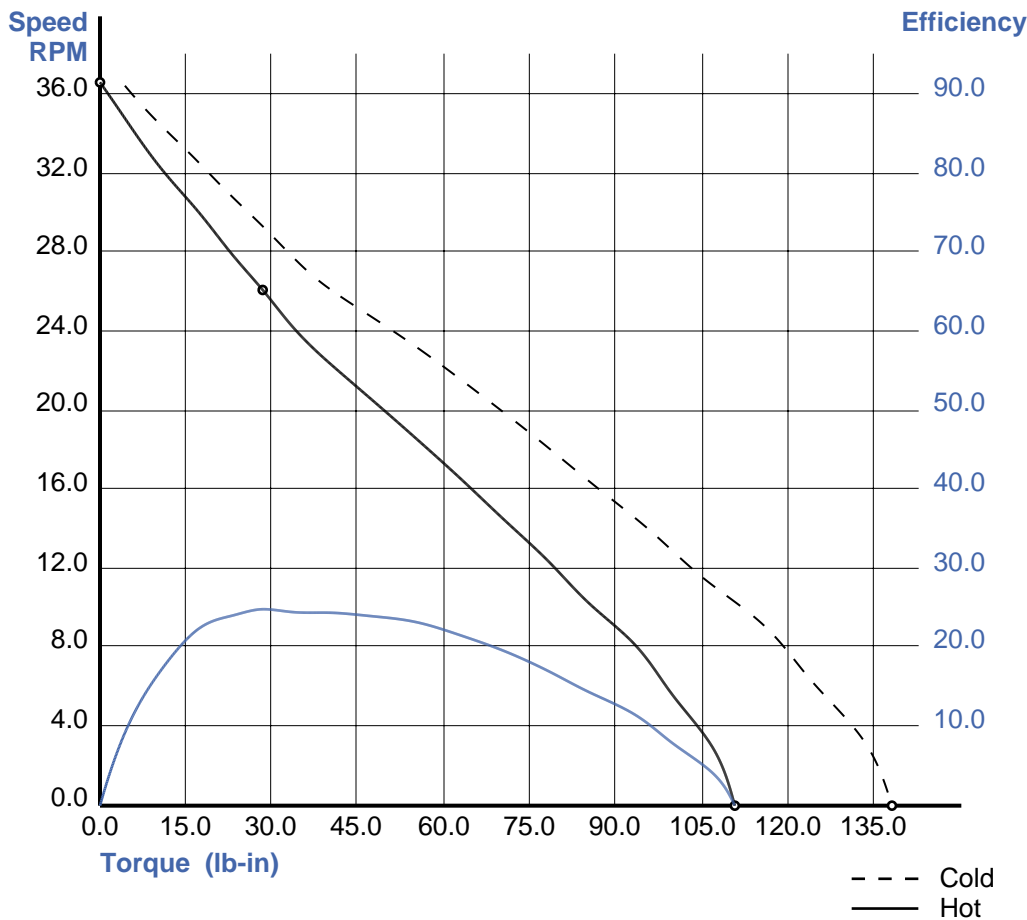

### SPECIFICATIONS

**Rating:**

Speed: 26.1 rpm  
Torque: 28.3lb-in  
Current: 3.4 amps  
Output: 9 watts  
Output: 0.0117 HP

**Duty Cycle:**

On: Continuous  
Off:

**Efficiency:**

Gearbox: 43.2 %  
Motor: 57.7 %  
System: 24.9 %

**Start/Stall Conditions:**

Current: 8.15 amps  
Torque: 137.92 lb-in

**Constants:**

Ke: 8.70 v/krpm  
Kt: 0.74 lb-in/amp

**Notes:**