
MOTORTEC™ DATA SHEET

Prepared by: **Groschopp.com** **08/17/20**

Motor: **AC 1 Ph 9060 TEFC**
Voltage: **230 v 50 Hz**
Speed: **2570 rpm 2 Poles**
Gearbox: **None**

Product ID: **6019**

## Speed, Efficiency Vs. Torque

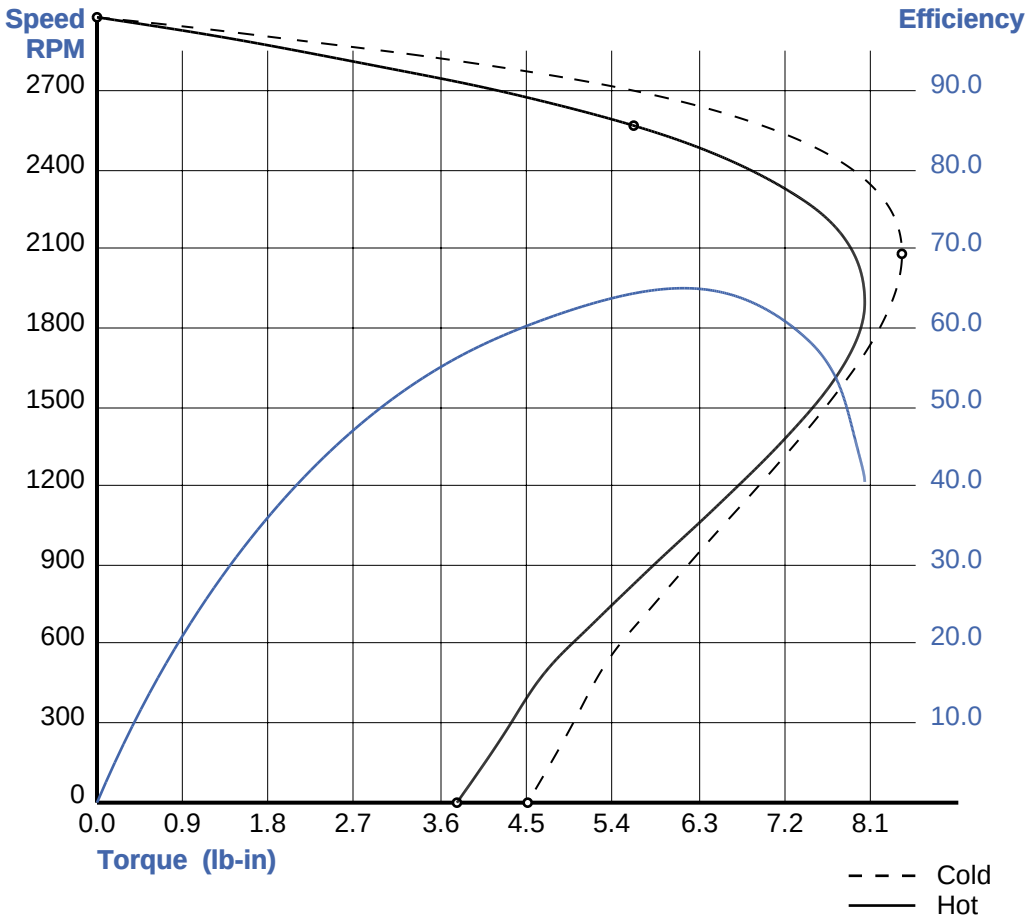


**Notes:** Capacitor - 7.5uF 440V

SPECIFICATIONS

**Rating:**
Speed: 2573.2 rpm
Torque: 5.6lb-in
Current: 1.12 amps
Output: 171 watts
Output: 0.2290 HP

**Breakdown (Cold):**
Speed: 2086.00 rpm
Torque: 8.41 lb-in

**Pullup (Cold):**
Speed: 0.0 rpm
Torque: 4.50lb-in

**Duty Cycle:**
On: Continuous
Off:

**Efficiency:**
Gearbox:
Motor: 64.5 %
System: 64.5 %

**Start/Stall Conditions:**
Current: 2.79 amps
Torque: 4.50 lb-in

There are not implied warranties that the goods shall be merchantable or that they are fit for a particular purpose. © 2020 Groschopp, Inc.

GROSCHOPP™
Groschopp, Inc., 420 15th Street NE, Sioux Center, IA 51250-2100 USA
(712-) 722-4135 Phone • (800) 829-4135 Toll Free • (712) 722-1445 FAX
www.groschopp.com